



1 Quick Start APPI-COM V3.X

- 1) Connect audio accessory to the terminal

 **DO NOT FORCE IT / ROTATE RED DOT SIDE UP**

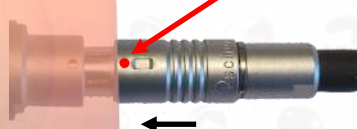

- 2) Start the terminal: 



- 3) Welcome screen

- ⇒ « TALK » = conversation mode
- ⇒ « LISTEN » = listen-only mode


4 Mic's sensitivity (VOX mode)

- Press  for 3 seconds




- Press  or  to adjust mic's sensitivity*

* -10: Loud voice, +10: Low voice

-  Appears when voice or noise is detected to help select the best setting

- Press  to validate

-  Appears if the value is **NOT** zero


2 Main menu




- Displayed channel: last in use

-  Selects channel menu (1_{LR} → 16_{SR})*


* LR: Long Range Channel, SR: Short Range Channel

-  Validates the displayed channel*


* Automatic validation after 5s

-  Changes the mode :
(conversation / listen-only)

5 Switch-off / Paging signal

- Press key 



-  Validates the switch-off command

-  Cancels the switch-off command*

* Automatic cancellation after 5sec

-  Pages the other in-team terminals

3 Communication (TALK mode)



- Communication OK: 

- Terminal rank : **1** (smiley = me)

- Sound volume : **6**

- Channel : **1** (CH:1_{LR})

- Kit number: **21**

- Volume control (1-10) with keys

 or 

 **DO NOT UNSCREW THE ANTENNA!**

Communication incidents



- Vocal alert « Low battery 20% »

⇒ Automatic switch-off within 45min

- Vocal alert « Low battery 5% »

⇒ Automatic switch-off within 5min

- Message flashing « **NO BATTERY** »

⇒ Automatic switch-off within 5sec

⇒ Connect the terminal to the charger with the provided USB cable