


CATALOGUE 2025 SAFETYCOMMS FIRST!



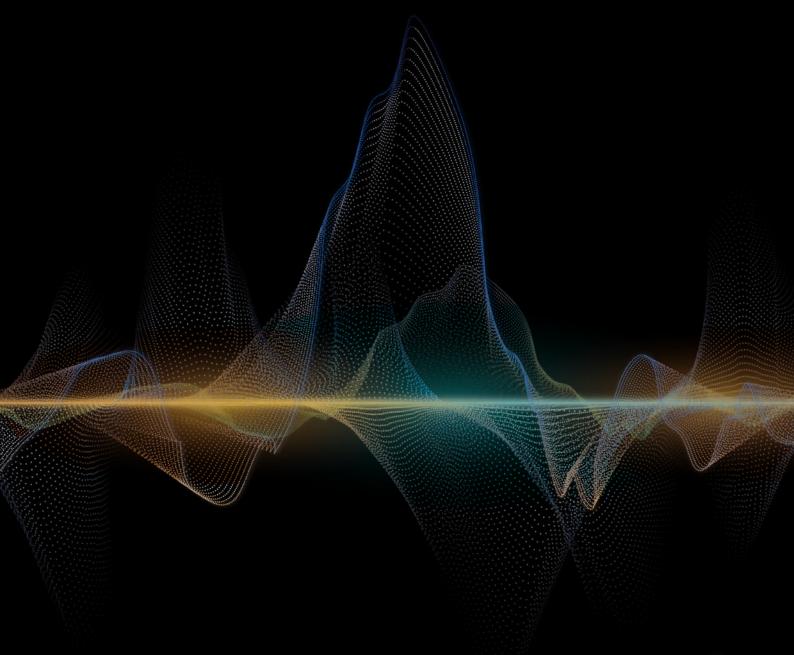


Our specialized application flyers

Safety:





LONE WORKER **PROTECTION OFF NETWORK AREAS**



RADIO-CONFERENCE **NOISE-CANCELLING HEADSET**

Industry:



INDUSTRIAL CLEANING



HANDS-FREE COMMS

SANITATION & CONFINED SPACES





INDUSTRY









HANDS-FREE COMMS HANDS-FREE COMMS

PHARMACEUTICAL

Civilian safety and Defense:



SWAT / POLICE





FIREFIGHTERS











CBRNE

COVERT

SAFETYCOMMS FI

DEFENSE

SUMMARY

Wireless intercom	D.E.I. 40
Choose your APPI radio APPI-CovR	
APPI-COVR APPI-Com	
APPI-GOIII	P 13 t0 14
Lone Worker Protection	
APPI-Smart	P 15 to 16
Wired intercom	
APPI-Line	P 17 to 19
Accessories	
Included accessories	P 20 to 21
Optional accessories	P 22 to 24
Audio Devices	
Noise-cancelling headsets	P 26 to 28
Light weight headsets	P 29 to 30
In-Ear & Technical	P 31 to 32
Remote Speaker Microphone	P 33
Transport Kit	P 34 to 35
Service, Support & Training	
Support services	P 37
Premium services	P 37
Training	P 37





Choose your hands-free APPI radio





CONFERENCE MODE (FULL-DUPLEX)

The patented technology (SyncAll patent), without a base or master, allows for natural communication in conference mode - no need to press a button and wait for your turn to speak. The encrypted network is deployed within seconds; APPI radios automatically identify the other teammates and start the conference.



HANDS-FREE

APPI radios allow professionals to have their hands free, allowing them to better focus on their mission



SIMPLE AND SECURE

Simplicity: 1 button and 1 connector to deploy the network within seconds and communicate freely with the team.

Safety: includes voluntary "Pager" alert, immobility detection with voice alert, and "SafeLine" function to know in real time who is connected.



NETWORK EXTENSION

Connect your APPI radio (via Bluetooth or wire) to any communication device to extend the range or share the conversation.



CONFIDENTIALITY

APPI radios can deploy a wireless, coded digital network in seconds with no installation required.

AN UNIQUE COMMUNICATION SOLUTION

Technologies comparison

SYSTEM	OFF- NETWORK	CONFIDEN- TIAL	FULL- DUPLEX	HANDS- FREE	LONG RANGE	NO FIXED OR MOBILE BASE	GOOD PENETRATION	1 RADIO For 2
GSM phone	X	X	/	/	/	X	<	X
Walkie-Talkies (PMR)	/	/	X	X	\	/	X	X
Bluetooth / WiFi / DECT (<500ft)	/	/	/	/	X	X	X	X
APPI Radios	>	/	/	>	>	>	/	/

How can APPI radios solve your communication problems?

COMMUNICATION PROBLEMS IN THE FIELD



Noisy environment



Distance



Personnal Protective Equipment



Occupied hands



Confined / Off-network spaces



Lone worker protection





- Conference mode (Full Duplex)
- No Push-To-Talk
- 3.8Km range (2.3mi)
- No base or Master
- Adapted Audio Headset
- Compact / Robust / IP66/67
- Noise Protection
- Lone Worker Protection
- Safeline
- Sending alerts from off-network zones to GSM

ADVANTAGES









Productivity



Ellicielicy



Licence Free

FOR ALL APPLICATIONS

APPI radio for all teams: 2 people and more ...











Compatible fits all PPEs (SCBA, Helmets, gas detector...)












Bluetooth option: compatible with a bluetooth headset and relays the communication to a phone

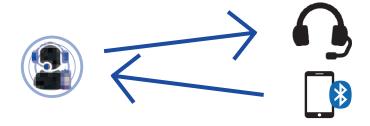

MULTI: switch from one team to another (up to 10 teams)

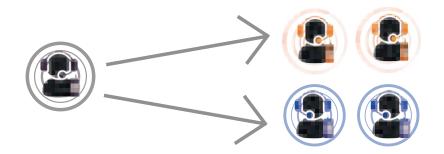


RELAY/EXTENDER: wired connection for obstacles from 15m (50Ft) to 300m (1000Ft)

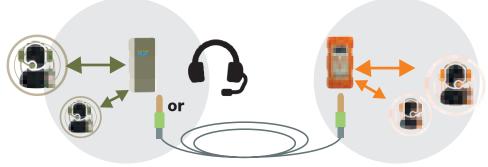

Safety Pack : Pager, Man-down alert (LWP), Safeline®


(connection/disconnection alert)

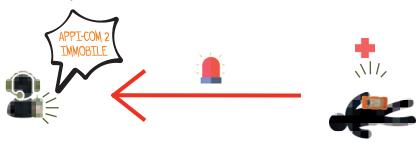

Communicate with someone outside the APPI-Radio network and include them in the network without changing headsets!



You work in pairs by sharing your APPI radio! APPI radios allow you to connect two audio headsets: one wired and one Bluetooth, simultaneously in conference mode.

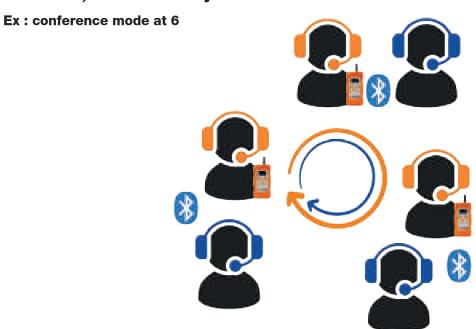

RADIO FEATURES

FEATURES APPI-COM APPI-C₀vR Power and flexibility All-in-one wireless noise-cancelling Atex: Potentially explosive environment Transmitting power <500mW (specific calibration on request) <500mW (specific calibration on request) **APPI-Com LR** Models APPI-CovR External antenna BS-APC2-XXX (Europe) BS-ACO-XXX (Europe) BS-APC2U-XXX (US) References BS-ACOU-XXX (US) OTHERS: ON REQUEST ATEX: ON REQUEST Radio Up to 3800m (2.3mi) Range Sound quality HD **RF Band** 863-870 MHz CE / 902-928 Mhz FHSS Channels 19 to 32 (country specific) Certification CE, FCC ATEX CE, FCC, Others **Features ATEX Version** No Yes Eco Mode No Yes (200mW) Beeper CALL Mode No Option **Nuclear calibration Option** Option Safety Pack (LWP + Safeline) Yes Yes Bluetooth audio Yes **Option** Defense configuration (P9) No Option Power and battery Talk time Up to 32-38h Up to 9 h Listen time Up to 32-38h Up to 10h USB /about 2h Charging USB /about 6h **Battery** Li-P0 / rechargeable Com&Charge Function Yes: Communication charging / Range extension except on Atex **General characteristic** 100x100x110mm (3.9"x3.9"x4.3") 91x48x15mm (3.6"x1.9"x0.6") Size Weight 445g (15.7oz) without Isoskin 80g (3oz) **Shocks Tests** IK8

IP56

IP66

IP67 (option or Atex)

WatertightNon

^{*} Rubber's color is customizable (21)



FULL-DUPLEX NOISE-CANCELLING COMMUNICATION HEADSET!

Product description:

APPI-CovR embeds a long-range conference mode radio and a Man-Down detector into a noise-cancelling headset, providing simplicity and safety.



Main features:

- Hands-free conference mode with an unlimited number of talkers.
- Maximum Range: Up to 3.8 km (2.3 mi) on a self-deployed and secure digital network.
- Attenuation: 31dB.
- Exclusive Full-duplex technology: no fixed or mobile base (SyncALL patent).
- Lone Worker Protection: Man-Down alert with relay through a smartphone.
- Confidentiality: digitally coded, each group has its own ID.
- Versions: Headband or helmet mounted (w/ 30 mm inserts).
- Removable rubber covers: +3 dB (IsoSkin patent).

Technicals specifications

Radio Range: Up to 3800m (2.3mi) Line-Of-Sight

Fréquencies: 863-870 MHz CE / 902-928 MHz (FCC/IC)

Number of channels: 19 (CE) / 32 (FCC/IC)

Transmission Power: < 500mW

Radio Certification: CE: ETSI EN 300 228 & 300 220-2 / FCC/IC part 15.247 / KDB 996369 D04

Electromagnetic Compatibility: ETSI EN 301 489-17 & ETSI EN 301 489-3 EN 62311

Electrical Safety: IEC 62368-1: 2014

Modulation: digital FM, Class I: no restriction

SAR value (head): CE: 0.049W/kg (limit: 2W/Kg) / FCC/IC: 0.059W/Kg (limite: 1.6W/Kg)

Bluetooth: Audio with GSM gateway, Class II Compatibility: APPI-Com (> V3.4) / APPI-Smart

Beeper/pager: yes

Man-down alert: yes plus relay trough a smartphone (APPI-Smart)

Noise attenuation (average): 30.77dB

DSP noise filters: White noise: -12dB / SingleTone: -30dB / Siren: -20dB

Battery life: 24 to 30h / Charge: USB (Up to 8h)

Battery: Li-ion -3.6V / 16.92 Wh

Dimensions (helmet mounted): 200x180x110mm (8.66x7.08x4.33")

Weight: without IsoSkin: 450g / 15.87 Oz / with IsoSkin: 575g / 20.28 Oz

Operating temperature : -20°C /+50°C Ambient Charging temperature : < 45°C



Attenuation values per frequency band

Atténuation VS fréquency	125Hz	250Hz	500HZ	1000Hz	2000Hz	4000HZ	8000HZ	Mean Attenuation
	6.49	10.74	24.37	31.19	26.38	34.08	38.28	27.02dB
With / avec Isoskin	10.70	15.73	26.60	32.88	30.13	38.08	46.56	30.77dB

Product range

Zone	Prefix	Headband / Helmet	IsoSkin Color	Antenna
CE	BS-ACO-	HB/HL	BK/GR/KY/BL/YE/RD/OR	
USA / CA	BS-ACOU-	HB/HL	BK/GR/KY/BL/YE/RD/OR	01US/02US/03





A SMART INTERFACE: APPI-Smart

The APPI-Smart app allows to:

- Remotely control your APPI-CovR.
- Automatically send alerts triggered by an immobility detection.
- Offer an access to the mobile network (LTE/3G/4G) for workers in «network denied areas» like confined spaces, sewers, tunnels, underground, etc..

REGARDER SUR YOUTUBE:







APPI-COM

Patented

FULL-DUPLEX RADIO

Product description

APPI-Com is the world's most advanced wireless tactical field communication device, providing a full-duplex, long-range solution for teams in hostile, noisy, or confined environments. It improves user safety with its new features; LWP (Lone Worker Protection) with voice alert, no fixed or mobile base (SyncAll patent), identification and voice alert of connected users (SafeLine patent), Pager button, etc. It is ultra-compact, lightweight, and rugged, making it easy to use and operate – simply press the power button and you're ready to communicate hands-free on a secure, powerful, and coded network. Furthermore, APPI-Com allows for natural conversation in the team despite physical obstacles (walls, floors, etc.) and personal protective equipment. Finally, it fits multiple audio headsets and eliminates ambient noise to permit focus on the mission at hand..



Main features

- Hands-free conference mode with unlimited number of takers
- Range: Up to 3.8km (2.3mi)
- Radio sharing: wired and Bluetooth connection
- Exclusive full-duplex technology: no fixed nor mobile base (SyncALL® patent)
- Lone Worker Protection: Man-Down alert with relay trough a smartphone
- Confidentiality: digitaly coded / each group has its own ID.
- Removable rubber covers



Technicals specifications

Radio Range: Up to 3800m (2.3mi) LOS

Fréquencies: 863-870 MHz CE / 902-928 MHz (FCC/IC)

Number of channels: 19 (CE) / 32 (FCC/IC)

Transmission Power: <500mW

Radio Certification: CE: ETSI EN 300 228 & 300 220-2 / FCC/IC part 15.247 / KDB 996369 D04

Electromagnetic Compatibility: ETSI EN 301 489-17 & ETSI EN 301 489-3 EN 62311

electrical parameters: IEC 62368-1: 2014 Modulation: digital FM, Class I: no restriction SAR: 1.1 to 1.24W/Kg (depends on version) Bluetooth: Audio with GSM gateway, Class II Compatibility: APPI-Com (> V3.4) / APPI-Smart

Beeper/pager: yes

Man-Down alert: yes plus relay trough a Smartphone (APPI-Smart)

DSP noise filters: White noise: -12dB / SingleTone: -30dB / Siren: -20dB

Battery life: 24 to 30h / Charge: USB (Up to 8h)

Battery: Li-ion -3.6V / 16.92 Wh Dimensions (HxWxD): 91x48x15 mm

Weight: ~ 80g / 3 Oz

Operating Temperature: -20°C /+50°C - IP 66 -

ATEX version: CE II 3G/D Eex is T6 IP67 (-10°C/+60°C)

Ambient Charging temperature: < 45°C

A SMART INTERFACE: APPI-Smart

The APPI-Smart app allows to:

- Remotely control your APPI-Com.
- Automatically send alerts triggered by an immobility detection.
- Offer an access to the mobile network (LTE/3G/4G) for workers in

«network denied areas» like confined spaces, sewers, tunnels, underground, etc...







LONE WORKER PROTECTION (LWP)

APPI-SMART APP

Reports Man-down alerts - License S Smartphone interface - License C

APPI-SMART

MOBILE APPLICATION FOR SAFETY - LICENSE S

The APPI-Smart App is the natural extension of your APPI radio. Its usage enhances the safety features of the Safety Pack, and provides an easy acces to the radio parameters when used under a protection suit (ex: chemical suit...).



APPI-Radio's connectivity brings Safety to workers in hazardous areas even without network access: a Man-Down alert generates an automated voice call to a pre-registered number plus a text and an email thanks to the **APPI-Smart ®** Android application.

SAFEGUARDING WORKERS IN THE WHITE ZONE


An APPI radio located in an LTE/3G/4G zone can communicate with other APPI radios in white zones (radio or wired mode), allowing workers in sewers, tunnels, or reservoirs to communicate with remote correspondents and automatically send safety alerts.

APPI-RADIOS'S NATURAL EXTENSION

APPI-Smart optimizes communication and alert management for isolated workers: the application automatically transmits an immobility alert by SMS and email, dated and geolocated, and establishes a voice communication with the referring person.

AUTOMATED ALERT: ENHANCE SAFETY

APPI-Smart enhances Safety alerts' management for workers in confined spaces: Man-Down alerts are relayed to the person-in-charge with an automated voice call, a text message and email with event's time and Team's location.

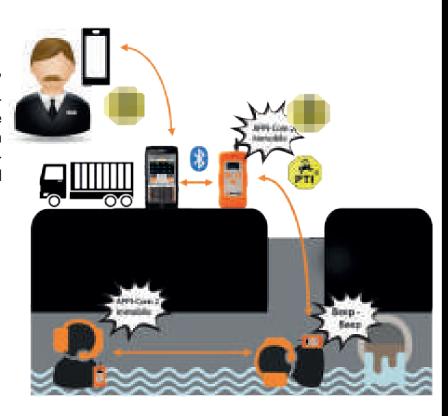

BEEP-To-CALL: CALL WITH A SIMPLE TOUCH

APPI-Smart allows calling a pre-registered number and conference-in your correspondant: great when the team needs help!!


APPI-RADIO REMOTE CONTROL - LICENSE C (FREE)

CONTACTLESS RADIO INTERFACE

When wearing a protection suit (NRBC, Pharmaceutical, etc.), APPI-Smart is used as a remote control of the APPI-Com Radio and offers a push-to-talk feature.





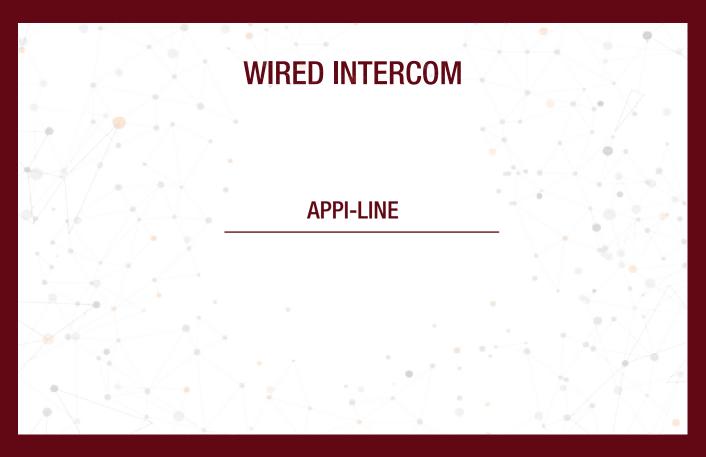

APPI-LINE: WIRED INTERCOM WITHOUT RADIO EMISSION


In radio sensitive environments (nuclear, ammunition, etc.) or with significant EM perturbations, when man cannot use radio emissions, APPI-Line allows workers to keep in touch.

Simplicity: APPI-Line can be deployed within minutes, and embeds the APPI-Com's strengths: compact, waterproof, shockproof. It allows you to connect a wide range of audio devices for full-duplex communication.

COMMUNICATION

APPI-Line adapts itself to your protective equipment and its noise-cancelling technology allows natural communication in all environments.

The system includes an APPI-Line intercom, a connection box, a cable on reel and two audio devices.

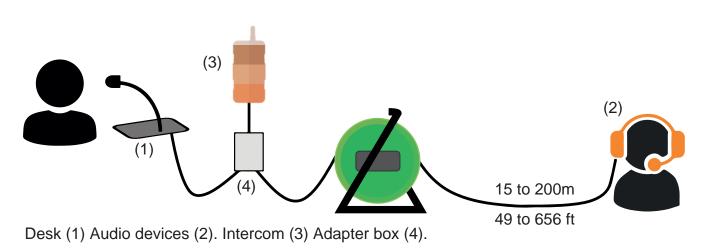

OPTION APPI-Com Line : Contact us

CERTIFICATION

IP66 Certified (dust and water), the system is designed to operate in critical environments. Totally autonomous, it can operate on AC power or on battery.


RUGGEDIZED

Small size and weight less than 3oz (80g), APPI-Line is choc-resistant (IK8 standard) and IP66 or IP67 waterproof (water and dust).

BATTERY LIFE

The APPI-Line includes a battery that allow up to 12 hours in communication. When connected to a power source, its "Com&Charge" function offers an endless battery life.



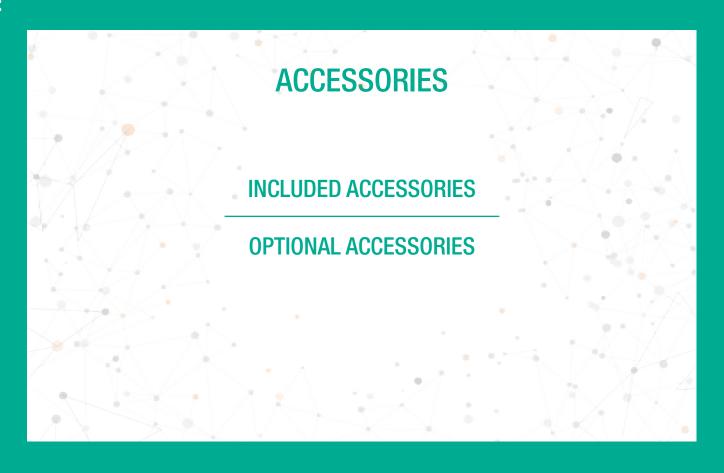

APPI-COM RUBBER PROTECTIVE COVER

This rubber casing is particularly effective against shocks, scratches and dirt.

The padded corners offer great mechanical robustness, while a transparent film protects the front side. They are available in various colours and can be cleaned with a damp cloth.

















BS-APC-RUBG01: Grey BS-APC-RUBR01: Red

BS-APC-RUBN01: Black BS-APC-RUBK01: Khaki

BS-APC-RUBB01: Blue BS-APC-RUB001: Orange

BS-APC-RUBY01: Yellow

NECK STRAPS





BS-APC-LAN01: Neck straps cloth BS-APC-LAN02: Neck straps PVC

BS-APC-LAN03: Neck straps PVC Kakhi

CHARGING KIT

The wall plug 4-port USB for charging four APPI-Com simultaneously.

- BS-BSX-EU4X: USB 4 ports charger EU version BS-BSX-UK10: USB 4 ports charger UK version
- BS-BSX-US4X: USB 4 ports charger US version





USB APPI CABLE: RECHARGING AND PROGRAMMING



The USB cable allows both charging the APPI radio and connecting it to a computer for software configuration.

- BS-APC-USB02: APPI USB cable for charging base
- BS-APC-USB03: APPI USB cable 10 cm for charging base
- BS-ACO-USB01: APPI-COvR USB cable



ANTENNAS

APPI-Com LR is usually supplied with an external antenna (ANT01): offers the best radio range (over 3000m in free field). For a more compact version, it is possible to order APPI-Com LR with ANT03. The radio range between two modules equipped in this way remains around 900m in free field.

SMA type RF connector for external antenna, removable in Europe version.

REFERENCES	LENGTH	ZONE	RANGE *
BS-APC-ANT01	15 cm	EUROPE	3.8 Km
BS-APC-ANT01US	17.5 cm	US	3.8 Km
BS-APC-ANT02	8.4 cm	EUROPE	1.2 Km
BS-APC-ANT02US	8.4 cm	US	1.2 Km
BS-APC-ANT03	2.8 cm	EUROPE / US	920 m
RS_APC_ANTO5 *	19.5 cm	FUROPE / US	4 Km

	vv
	ar m Al
01 01US 02 02US 03 05	

To be mentionned upon order

In FCC/IC & ATEX Version: cannot be swapped in the field

Approximate range between two models with the same ntenna Data neasured with PPI-Com I R

Rotating

JEDI ANTENNA

For fixed stations: Cover your entire site with JEDI antennas. Indoor or outdoor use.



- BS-APC-ANT06: Exter.wall antenna SMA 5 dB 3m RF cable
- BS-APC-ANT07: Exter.wall antenna SMA 8 dB 3m RF cable

CHEST HARNESS



The harness, splitter cable, and battery pack enable you to take your APPI-Com and recharge pack wherever you go. The splitter allows you to use the radio while charging it (not available for the ATEX version).

Pack BS-APC-HAPWR01

- BS-APC-HAR01 : APPI-Com Harness
 APO HGRPATOS Participa GOOGLEAN
- BS-APC-USBBAT06 : Battery 6000mA.h
- BS-APC-CASPLIT01 : Cable



ARMBAND

Wear your APPI-Com securely around your arm without hindering your movements during professional operations. This small, lightweight device is made of neoprene material, thus providing you with maximum comfort. It will also protect your radio from inclement weather, perspiration, scratches, and dirt...

BS-APC-BRAS01

DELUXE LEATHER CASE

The deluxe leather case is equipped with a rotating clip that allows you to carry your APPI-Com device.

BS-APC-LPOUCH01



CLIP FOR APPI COM

The clip is attached directly to the back of the APPI-Com. It can be worn directly on your belt or in a pocket.

BS-APC-CLIP01



SPECIALS KEYBOARD (OPTION)



The front keyboard can be customized to the preferred image of your company: Such as Defence keyboard, or by including a logo.

- BS-APC2-OPTDEF: Army configuration (Keyboard Army IP67 Screen switch off)
- Company logo inclusion : contact us for more details.

PUSH TO TALK / DOUBLE POSITION

To alternate from full-duplex (conference mode) to «push to talk» conversation. It can be integrated directly on any audio equipment.

BS-APC-PTT90



WIRED EXTENSION AND RELAY BOX



Headset extender: wired connection between helmet and radio to pass through walls/obstacles.Relay box: wired connection between two radios of two different groups to create a wired intercom.

- BS-APC-CAHSEXT15: Headset extender 15m
- BS-APC-RELAY01 : Relay box



WALKIE-TALKIE GATEWAY

PTT-DUAL

This push-to-talk box offers 3 connections for : your APPI-Com, your walkie-talkie and your audio device.

This push-to-talk box allows you to hear on both networks with one single audio device. You can then operate either on the APPI-Com network, or on the Walkie-Talkie network, or both at the same time!

- BS-APC-PTTD90DP: PTT APPI-Dual -DP3400
- BS-APC-PTTD90TPH: PTT APPI-Dual -TPH700
- BS-APC-PTTDGP388 : PTT APPI-Dual GP388
- BS-APC-PTTDP2G: PTT APPI-Dual P2G
- To fit your brand of walkie-talkie, please contact us.

SMARTPHONE LISTENING CABLE

Cable to connect an APPI-Com radio to a smartphone and to record the communication.

• BS-APC-CAECS



APPI WALL-MOUNT

Wall-mount for APPI-Com / APPI-Com LR, which can also be attached to curved surface, cord, or elastic band.

BS-APC-WALLFIX01







APPI-COM AUDIO DEVICES

NOISE-CANCELLING HEADSETS

LIGHTWEIGHT HEADSETS

IN-THE-EAR & TECHNICAL

REMOTE SPEAKERS

All wired peripherals are delivered with an exclusive APPI high reliability connector: metal, circular, with coded pin and pushpull lock. For more references contact us.

		*	€£			5	©
LEGEND	ARI (respirator)	Bluetooth	Atex	Defence	Public Safety	Industry	REST * Industry

^{*} Recreation, Entertainment, Sports, and Tourism



Noise-Cancelling

EARMUFF

CABA





This ATEX-certified passive noise-canceling audio headset with boomer microphone has double articulation and is specifically configured for the APPI-Com, providing 29dB of sound insulation. This professional headset is equipped with an insulating shell (ABS) that is adapted for conversations in noisy environments and operates "hands-free" without requiring a PTT (push-to-talk) button – making it the perfect audio accessory for users in high noise environments.

BS-APC-CABA1 : Noise cancelling audio Headband

BS-APC-CABA3: Noise cancelling audio headset for helmet

BS-APC-CABMIC : CABA1 and CABA3 micro





A-KABEL





Bluetooth industrial noise-cancelling headset (SNR isolation = 28dB) with boom microphone. Supplied with charger for AA size rechargeable batteries, or battery operation (2xAA). Available in headband or helmet mounted version.

- BS-APC-CABBTAK01: Noise cancelling audio Head band Bluetooth AK
- BS-APC-CABBTAK02 : Noise cancelling audio Helmet Mounted Bluetooth AK



CAB







Noise cancelling audio headset that are installed directly on the helmet by a fixing system. 24dB sound insulation.

BS-APC-YELLOWCAB : Yellow headset



HP90







This passive noise-cancelling headset features a noise-cancelling microphone with 23dB isolation, making it ideal for conversations in very noisy environments. It is mounted with an insulating hull and is equipped with a metalized rear neck collar to ensure secure positioning even when wearing a hard hat.

BS-APC-CAB02 : Headset



NOISE-CANCELLING HEADSET WITH TALK THROUGH

SUPREME







Noise-cancelling headset with noise-cancelling microphone and situational awareness. Offers up to 24dB passive isolation, as well as an 82dB limitation ("Cut-off" function) for very demanding environments. Each shell features two speakers, providing a "fail-safe" option in case of low battery power and enabling uninterrupted radio communication. The headsets are available in both neck-loop and head-mounted models.

- BS-APC-SUPMA: Headset
- BS-APC-SUPMN : Sup MIL Headband

Cannot be sold without BS-APC-CAMSA02 ou BS-APC-PTTMSAN90

- BS-APC-SUPMSAN90: : MSA Sup Lead /w PTT APPI 90° connector
- BS-APC-CAMSA02 : APPI-connection cable





ACTIVE NOISE REDUCTION (ANR): NOISEMASTER™

NEW & EXCLUSIVE









Hearing protection headsets with active noise cancelling provide the most effective protection against low frequency noise, where traditional plastic shells are ineffective. This technology improves communication clarity and alarm signal perception on-site.


The ANR technology is based on a miniaturized electronic module positioned inside the shell of the headphones, which is connected to a small microphone that picks up ambient noise and a small loudspeaker that generates counter-noise near the ear in order to significantly reduce the noise in the eardrum.

This system is patented worldwide and is suitable for all communication applications in a noisy environment.

TECHNICAL CHARACTERISTICS

- Autonomy: 25 hours/ Charging time: 2 hours
- Operating temperature: 15°C to + 55°C/ Storage temperature: 20°C to + 55°C
- Power: 4,8V DC/ Consumption: 30 mA
- Attenuation in low frequencies: 15 dB in passive mode and 40 dB in active mode
- Operation in ambient environment of up to 120 dB
- Dimensions: 140x190x100mm Weight: 550g

Supplied with APPI connector (or other : please contact us) for the communicating version, and a power charger.

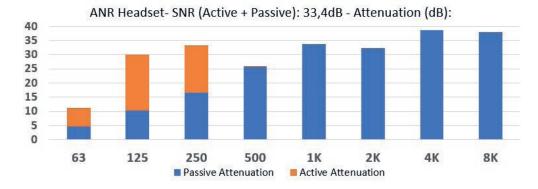

- BS-ANR-FCA Noise cancelling headset Active Noise Reduction Communicating, Headband
- BS-ANR-FCN Noise Cancelling Headset Active Noise Reduction Communicating, Neckband (for construction helmet)
- BS-ANR-NCA Active Noise Reduction Headset Not Communicating, headband
- BS-ANR-NCN Noise Cancelling Headset Active Noise Reduction Not Communicating, Neckband (for construction helmet)

LIGHT

LIGHT AUDIO HEADSETS - 2 EARPHONES

OPCOM











TOP SALES

Ultra-Light (33g) Bluetooth (5.0) headset with Noise Cancelling boom microphone and Bone-Conduction speakers – Allows for Situation Awareness or the use of Noise Protection ear plugs.

 BS-APC-OPCOM : Lightweight bluetooth bone conduction headset with noise-cancelling boom microphone



SKIPPY









Neckband headset including two earphones and a boom microphone. Adjustable and robust, it allows clear and precise communication, essential for safety, instruction or conversation.

This headset meets the requirements of the constrained environment (Firefighters, Industries): it is compatible with the wearing of most existing protective helmets.

• BS-APC-SKIPPY : Adjustable dual-loudspeaker headphones



TEMPEST







Ultra-Light Dual sided In ear speaker with NC boom mic and inline PTT/Duplex (Version 02) - In-ear (situation awareness) or noise cancelling

Active Noise Electret microphone and hearing-aid quality in-ear speakers.

Provided with ear plugs (hearing protection) and in-ear environment awareness inserts

- BS-APC-TEMPEST01 : Headset audio
- BS-APC-TEMPEST02 : Headset audio with PTT/Duplex



STUDIO 2 - 1 PAD



Lightweight and comfortable headset for indoor use, with flexible boomer microphone and adjustable headband. Recommended for use in studios, offices, stages and work environments. Left or right use by rotating the flexible microphone and interchangeable foams for earphone and microphone.

BS-APC-STUDIO2 : Audio headset



EARPIECES

MCOM4









In-ear headset with boomer microphone; can be ordered with or without push-to-talk depending on use. PTT version includes a «locked» mode allowing full communication duplex.

BS-APC-MCOM4 : Mini headset
 BS-APC-MCOM4PTT : With PTT

• BS-APC-B03L : Pair of triple flange silicone ear tips

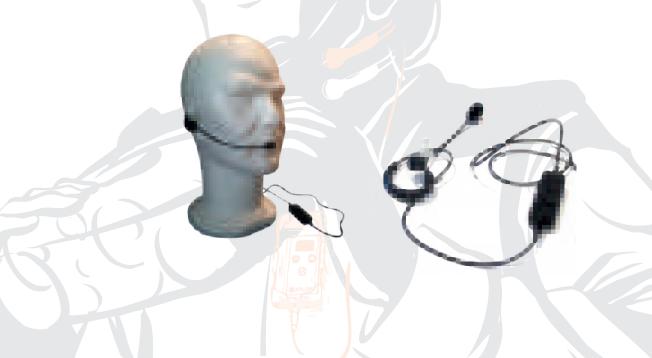

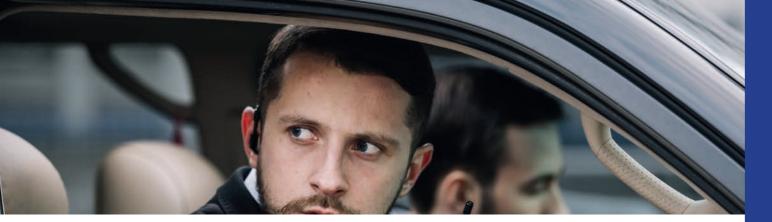

In-Ear & Technicals

BONE CONDUCTION / CARTILAGE MICROPHONE

МЗН















This integrated audio device features both a loudspeaker and a bone conduction in-ear microphone, providing excellent noise isolation of up to 40dB from external noise. It also allows for vocal vibration to be collected directly in the ear canal, enabling a "soft spoken" conversation even in very noisy environments. Additionally, this audio device is compatible with all Personal Protective Equipment (PPE), such as helmets and Self-Contained Breathing Apparatus (SCBA), and comes with disposable plugs providing up to 32dB of hearing protection..

2 speakerphone :

- BS-APC-M3hDL02 : Left ear / 2 HP 90° plug connector
- BS-APC-M3hDR02: Right ear / 2 HP 90° plug connector
- BS-APC-M3hDXL01 : ATEX, left speaker + right speaker
- BS-APC-M3hDXR01 : ATEX, right speaker + left speaker

Pair of ear-plugs : (pack of 10)

- BS-APC-BOINTSBLK-10 : Size S
- BS-APC-BOINTMRED-10 : Size M
- BS-APC-BOINTLBLU-10 : Size L









Headset with noise cancelling microphone and bone conduction loudspeakers.

Ideal for professionals in very demanding environments.



BS-APC-OBPTT01 : Bandeau Ostéophone Boomer PTT



THROAT MICROPHONE











With a flexible collar, it is positioned around the neck to pick-up the larynx vibrations: adapted to noisy or windy environments (machine room, factories, airports, quarries, hunting, skiing, etc.).

It allows the wearing of filtering or respiratory masks.

- BS-APC-LARC03: With speaker
- BS-APC-LARCA3 : ATEX with speaker















This dual earpiece features innovative technology: a classic speaker on one side and a hypersensitive microphone on the other. A system optimized for small footprint and high discretion.

- BS-APC-DBHS02 : Dual "Microphone-HP" Headset
- BS-APC-DBHS02X1 : ATEX Dual Microphone-HP Headset
- BS-APC-B03L : Pairs of ear-plugs / 3 winglets





FACE MASKS AND HELMETS



Noise cancelling headset with noise cancelling boomer microphone and situation awarness. It offers up to 24dB isolation, with an external hearing limitation of 80dB.

- BS-APC-CABF101 : Headset with hearing protection and boomer microphone
- BS-APC-EAF1XF1: 1 Speaker Audio Headset with Boomer Microphone
- BS-APC-EAF1XF2: 2 Speakers Audio Headset with Boomer Microphone

Audio cable adapter :

The APPI-Com can be directly connected to the helmet or face mask to offer a plug and play system: hands-free / full duplex.

- Peltor MT632: BS-APC-CA3M362 (may include APPI PTT: BS-APC-CAPTT3M362)
- Dräger FPS-COM + BS-APC-CAFPS
- Dräger FPS-COM 5000 : BS-APC-CAFPS5000
- Dräger Panorama : BS-APC-CAPANO
- MSA F1XF: BS-APC-CACOMKIT









REMOTE SPEAKERS

REMOTE SPEAKER MICROPHONE AND ACCESSORIES











Shoulder amplified wireless speaker microphone. This audio system includes an amplified loudspeaker and various micro speaker options.

- BS-APC-RSM350 : Wired
- BS-APC-RSM100 : Earpiece kit for micro-hp savox
- BS-APC-RSM101 : Earpiecet kit (intra) for micro-hp savox
- BS-APC-RSM102 : Earpiece kit (Acoustic Tube) for micro-hp savox

APPI AUDIO DECK







The Audio Desk includes an amplified loudspeaker with adjustable volume and a «gooseneck» microphone activated by push button. It allows you stay in touch with mobile workers: the team can be monitored in

real time by a fixed operator in an office or behind a window.

BS-APC-PUP01



BLUETOOTH NOMAD SPEAKER













Connect your APPI-Com radio to this Bluetooth portable speaker which provides high quality sound and can be magnetically attached to any steel surface, attached to a lanyard, or stood up on any flat surface. Rated IP45 Waterproof/Dustproof

Autonomy of up to 10 hours
Hands-Free Microphone function

- BS-APC-KT00L01: Bluetooth Speaker with Microphone
- BS-APC-KT00L02: Large Bluetooth Speaker with Microphone

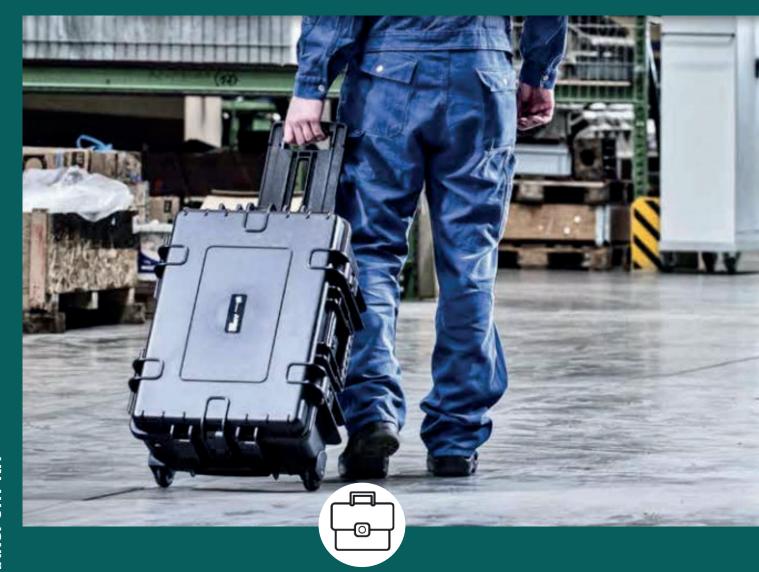

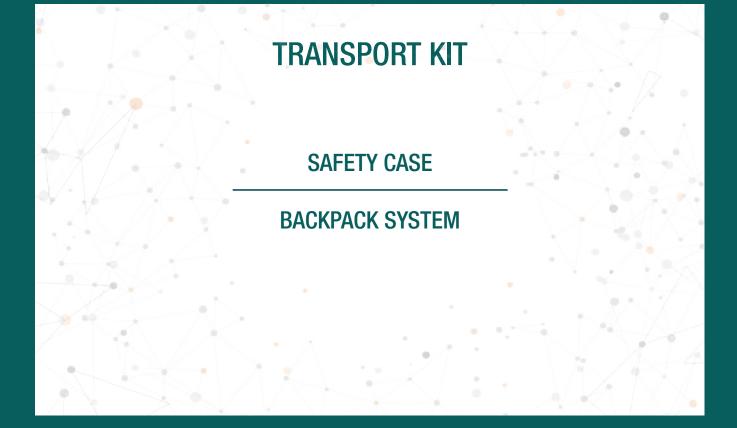

TRANSPORT KIT

SAFETY CASE



XS



Shock-resistant polypropylene (PP) Stackable, Water and dust proof Double-stage locks, easy to open - even with one hand Automatic air pressure compensation Suitable for temperatures from -40°C to +80°C

Dimensions:



BS-APC-BW1000: Transport black case size XXS

XS: Ext 272 x 215 x 106 mm - Int 249 x 177 x 94 mm

BS-APC-BW3000: Transport black case size XS XS Case sold with pre-cut foam dividers.

S: Ext 420 x 325 x 180 mm - Int 384 x 264 x 164 mm

- BS-APC-BW4000: Transport case size S
- BS-APC-BW4000Y: Transport yellow case size S

M: Ext 468 x 365 x 188 mm - Int 432 x 301 x 170 mm

- BS-APC-BW5000: Transport case size M
- BS-APC-BW5000Y: Transport yellow case size M

L: Ext 510 x 419 x 215 mm - Int 473 x 351 x 196.6 mm

- BS-APC-BW6000: Transport case size L
- BS-APC-BW6000Y: Transport yellow case size L

XL: Ext 609 x 428 x 263 mm - Int 534 x 357 x 225 mm

BS-APC-BW6700: Transport case size XL with wheels

XXL: Ext 660 x 490 x 335 mm - Int 585 x 410 x 295 mm

BS-APC-BW6800:XXL size transport case with weels

All suitcases are equipped with Velcro partitions and a lid pocket and strap.

BACKPACK SYSTEM

XL & XXL




For easy, comfortable and hands-free transport of your equipment. Suitable for sizes M and L.

Attaches easily to your suitcase

Note: To attach the backpack system to the case, you must first drill the screw fixing holes in the outer case. A drilling template, screws and detailed instructions are included in the delivery. In addition, you will need a drill (size 5) and a screwdriver.

BS-APC-BWBPS: Backpack holder for carrying case M or L



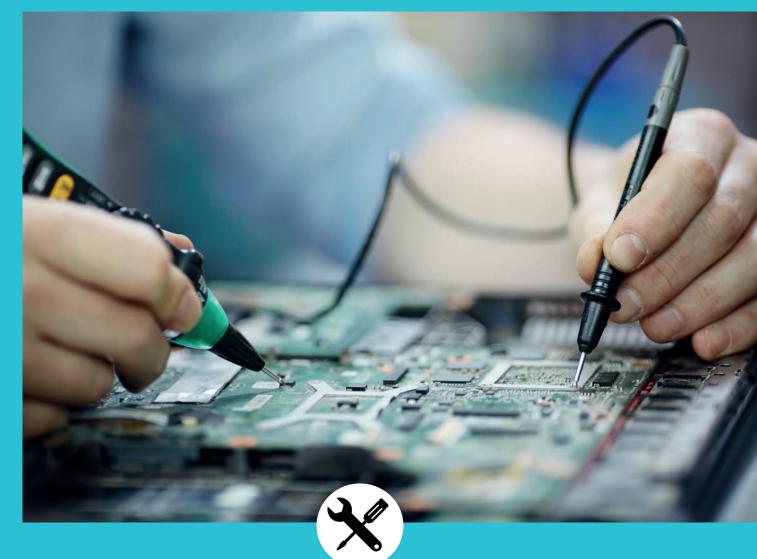

SERVICE, SUPPORT & TRAINING

SUPPORT SERVICE

PREMIUM SERVICE

TRAINING



SERVICE, SUPPORT & TRAINING

APPI-SUPPORT SERVICE

Offers maintenance and upgrades for your device, including cleaning, updating and RF verification, as well as replacement of any defective parts such as the film, protective shell, strap, mini-clip, and battery.

APPI-PREMIUM SERVICE

Annual service warranty for APPI Radio systems: APPI support service plus repair insurance for a radio or provision of equivalent equipment.*

	APPI	APPI
	SUPPORT	PREMIUM
Radio: Cleaning / Updating / RF Verification		
Radio: replacement if defect: film, protective shell, strap, mini-clip, battery.	•	•
Radio: Break / Refurbishment (or provision of equivalent equipment)		

- SER-APC-SUP: APPI-SUPPORT customer service
- SER-APC-SUPA : APPI-SUPPORT ATEX customer service
- SER-APC-SUPREM : APPI-PREMIUM customer service
- SER-APC-SUPREM : APPI-PREMIUM ATEX customer service

SPECIFIC PRODUCTS

Do you need a specific product? Contact us at info@appi-technology.com

TRAINING

Ask for our APPI-Com training courses: «Use», «Sales», «Configuration». Our experts are there for you.

Contact us

^{*} See the special conditions of the contract.




APPI-Technology SAS

443 avenue Jean Prouvé 30900 Nîmes, France info@appi-technology.com +33 9 83 98 68 73

APPI-Technology Inc. - USA

185 Alewife Brook Parkway - Suite 210 Cambridge, MA 02138 - USA info@appi-technology.com +1 865-722-5729

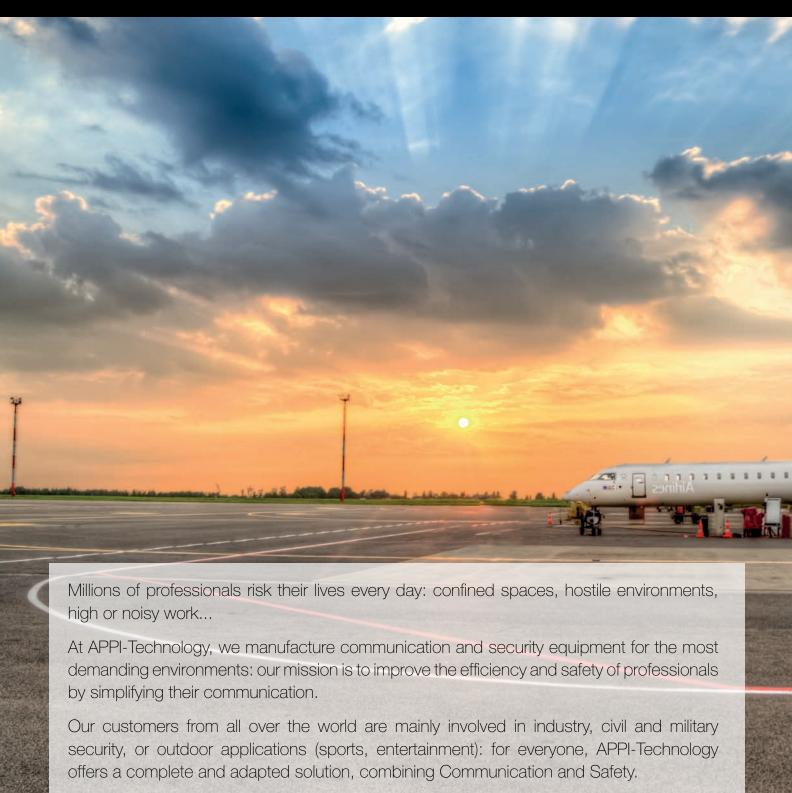



appi-technology.com

APPI-Technology - All rights reserved © 2025

APPI® & APPI-Com® are Registered trademarks